


Q Code 61 Gun Type Series



LASER	CCD	1D	LONG RANGE	300 Scans Per second	1D: 3 mil	Over Voltage Protection	On screen Barcode	Drop 1.5m	ESD SAFE
RS232	USB	VCOM	OTG	FCC CE	RoHS	Stand	OEM ODM	EXTENDED WARRANTY	2 Year Warranty



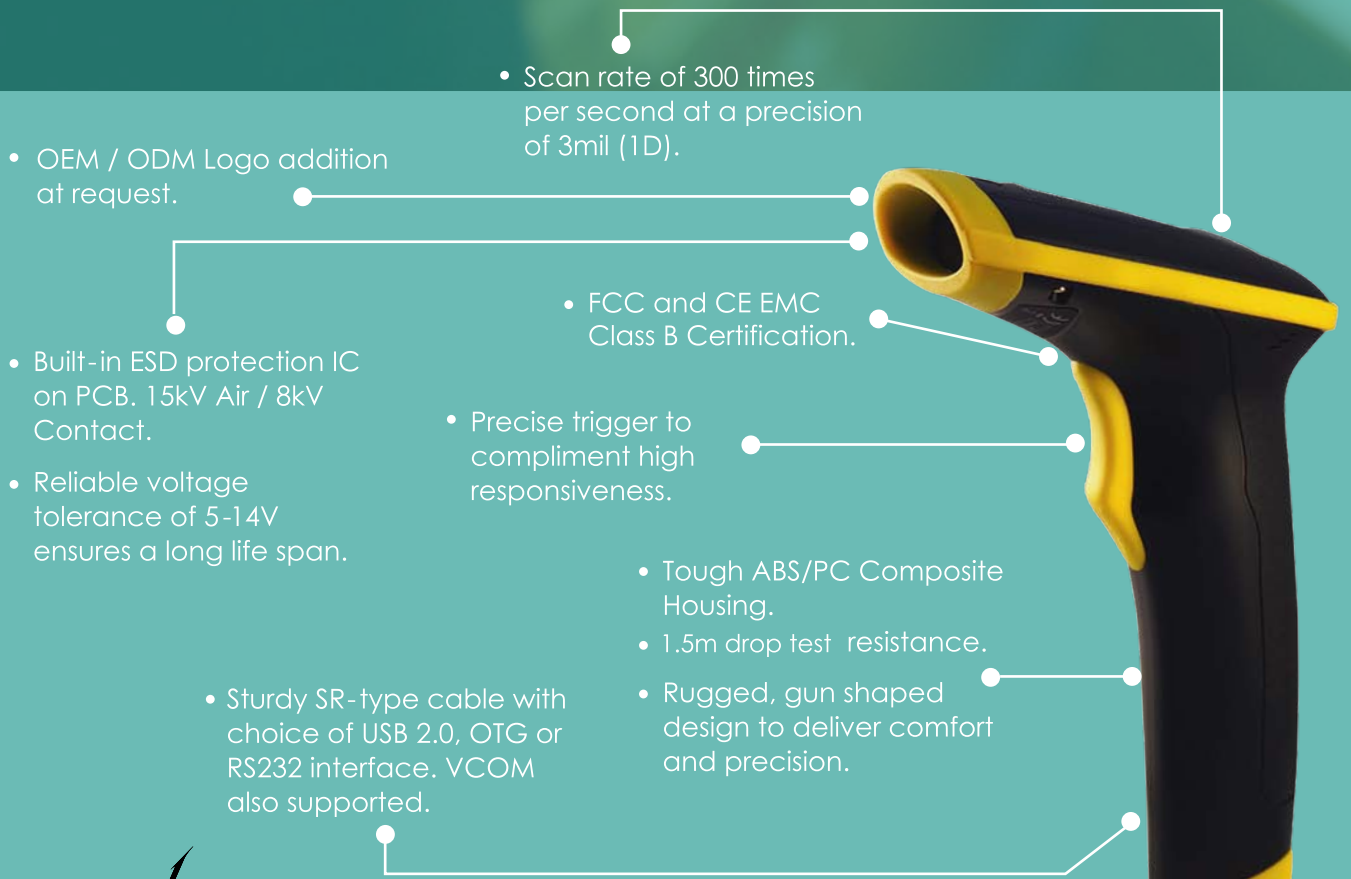

SPECIFICATIONS

Q Code61 Series

	QC610X	QC611X
Category	CCD Linear Imager	Laser
Housing	ABS	
Performance		
Interface	USB / OTG / RS232 / VCOMM	
Scan rate	300 Scans per sec	
1D Symbologies	EAN-13, EAN-8, UPC-A, UPC-E, ISSN, ISBN, Codabar, Code 128, Code 93, ITF-6, ITF-14, Interleaved 2 of 5, Industrial 2 of 5, Standard 2 of 5, Matrix 2 of 5, GS1 Databar, Code 39, Code 11, MSI-Plessey, Plessey	
Reading Precision	≥ 3mil	
Light Source	610nm-640nm	648nm-660nm
Depth of Field	EAN13(13mil): 50~610mm	
	UPCA(13mil): 50~620mm	
Symbol Contrast	≥ 30% Reflectance Difference	
Scan Angle	Pitch	±60° @ 0°Roll and 0° Skew
	Roll	±30° @ 0°Pitch and 0° Skew
	Skew	±60° @ 0°Roll and 0° Pitch
Field of View	-	
Mechanical/Electrcal		
Maximum Power Consumption	0.28W	0.33W
Input Voltage	DC 5V ± 5%	
Operating Current	85 mA	100 mA
Standby Current	25 mA	
Dimension	100 mm x 62 mm x 175 mm (LxWxH)	
Weight	120g ±10 (^W / _{Cable})	190g ±10 (^W / _{Cable})
Environmental		
Operating Temperature	-20°C ~ +60°C	
Storage Temperature	-40°C ~ +85°C	
Humidity	5% -95% (non-condensing)	
Ambient Light	0 ~100,000 LUX	
Certifications	FCC Class B, CE EMC Class B, RoHs	
Accessories		
Cables	USB Cable / RS232 Cable / OTG Cable, 1.8m	

APPLICATION:

- Point of Sale
- Inventory Checking
- Document Handling
- Ticket and Access Management
- Manufacturing
- Asset Tracking

ACCESSORIES

